

Alu-CabTM

MAKE IT BETTER

FINAL ASSEMBLY INSTRUCTIONS

CC SIDE TABLE MAIN ASSEMBLY


CC-A-TRX-TBL

Assembly Instructions

GA


CC-A-TRX-TBL

FA ASSEMBLY OF TRAX TABLE PARTS

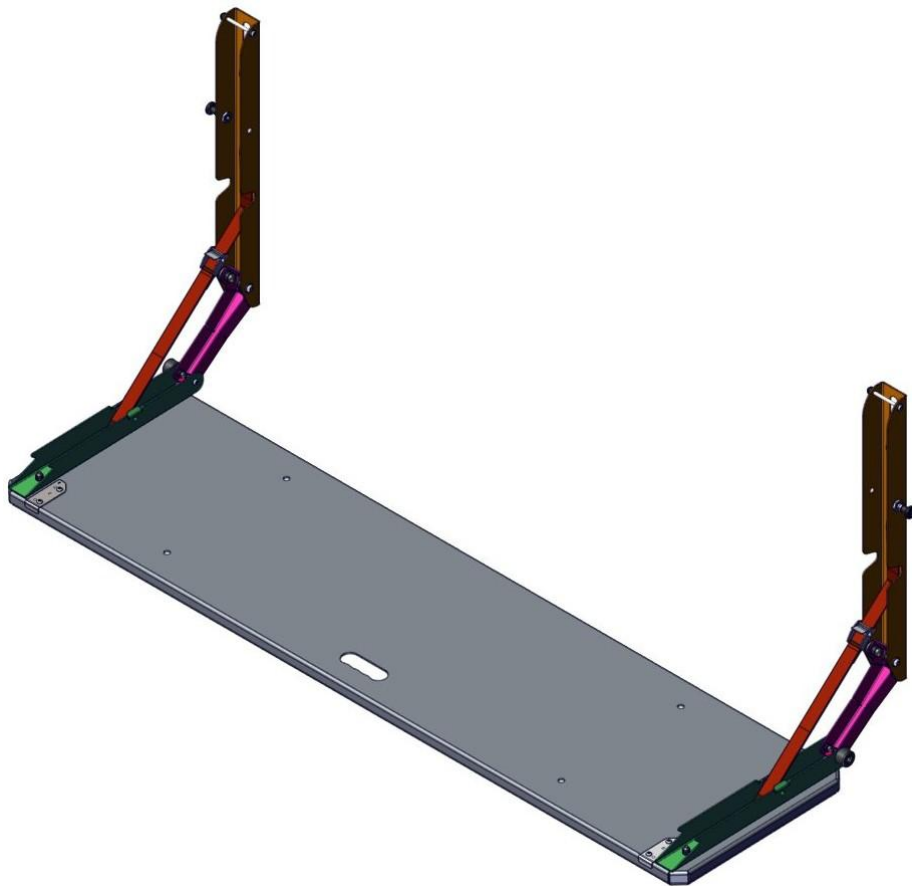


Assembly Instructions


Parts assembled separately for boxing

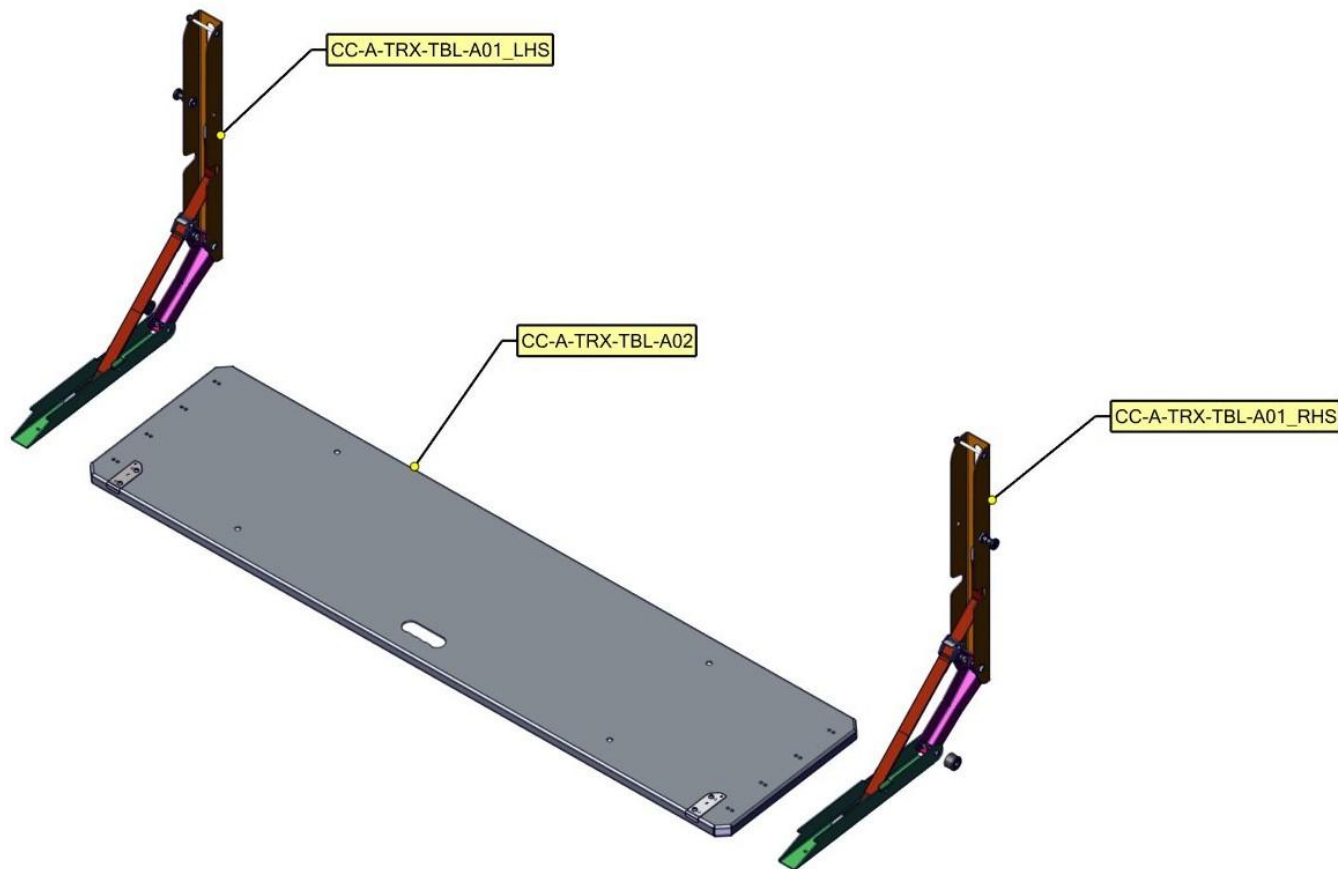

Assembly Instructions

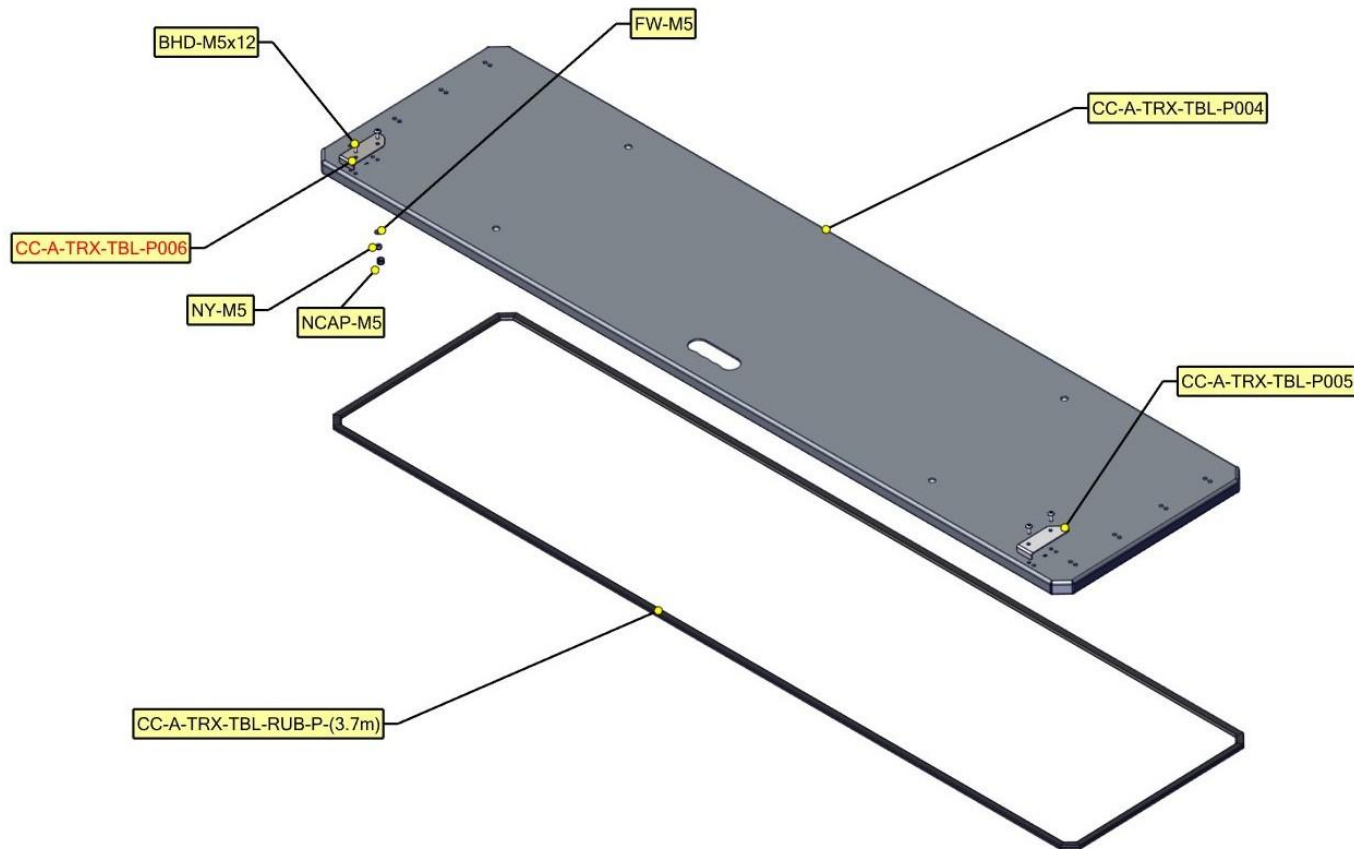


Assembly Instructions

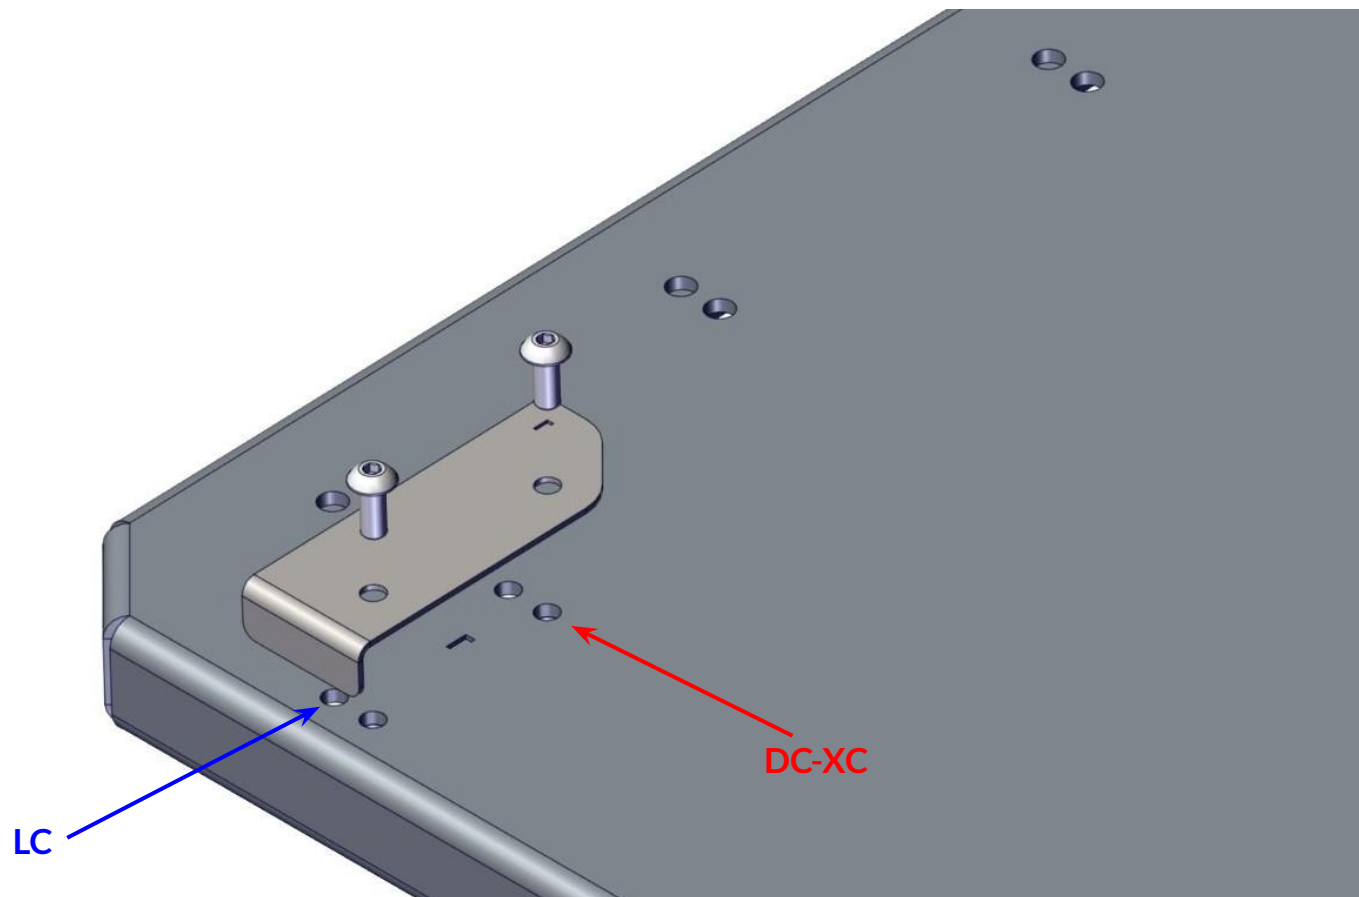

Assembly Instructions

CC SIDE TABLE TRAY ASSEMBLY

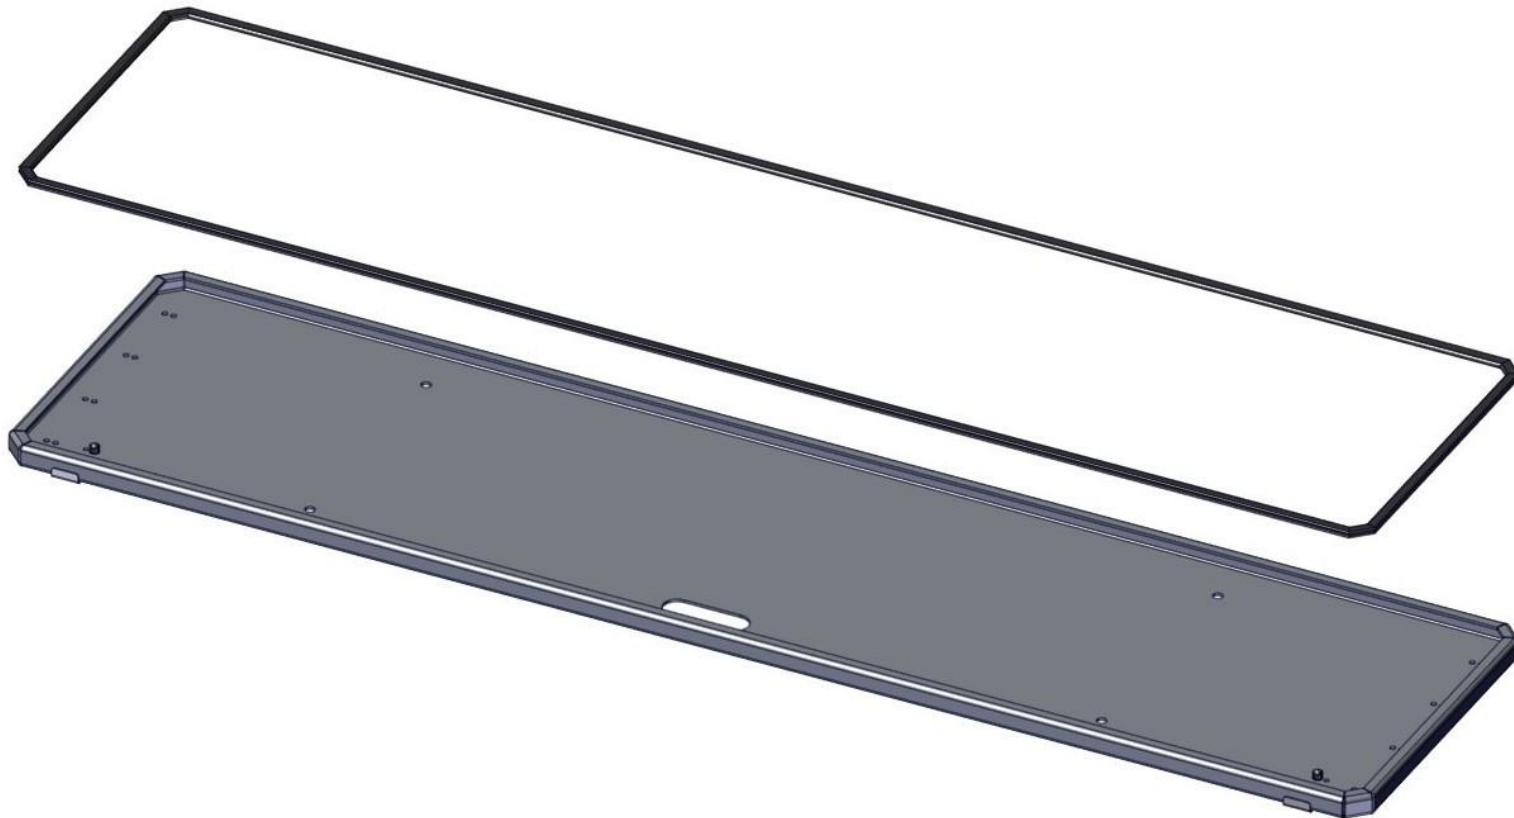

Assembly Instructions




CC SIDE TABLE MOUNTING ARMS – LH & RH

Refer to drawing CC-A-TRX-TBLE-A01 for Parts List

Assembly Instructions

When mounting Spring Plunger Pin to the bracket, make sure of a 5mm distance between the spring face and inside of the bracket as shown below.

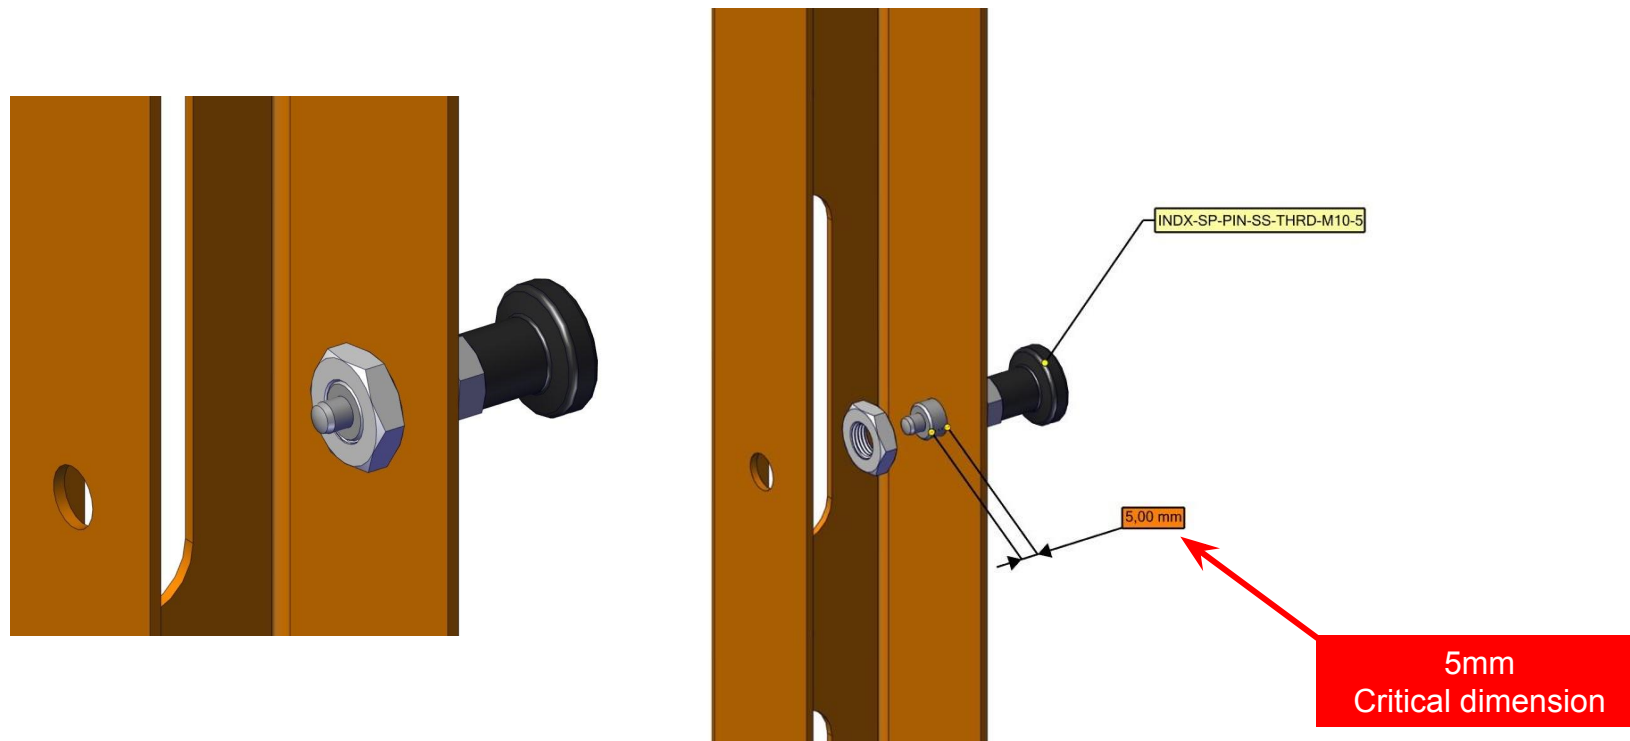

Assembly Instructions

END