



FITMENT INSTRUCTIONS

MODCAP & CAMPER MOLLE PLATE - FIREPLACE

Installation Instructions

Preliminary information

Installation and fitment instructions includes the tools required, fasteners included in the kit, and the hardware included in the kit.

Please follow the instructions and check installation steps with the images in this document.

Alu-Cab recommends that all sealing work is allowed to cure for 24 hours, after which you may drive the vehicle on normal paved roads. Before driving off-road with your Alu-Cab product or operating your roof conversion, an additional cure period of 48 hours is required.

Failure to follow these instructions will void your warranty. Please ensure that you follow the sealant manufacturers curing time as per their technical data sheet.

These times may differ slightly from the times we have recommended.

Service Enquiries email
queries@alu-cab.com



Installation Instructions

Canopy Fitment – Tools, Fasteners & Hardware

1.1

Tools & Items Required

Rubber Mallet
Star / Flat Screwdriver
5mm Allen Key
13mm Spanner

1.3

Fasteners Supplied for **Singular** Fireplace Molle Plate

FULL SIZE FIRE PLACE MOLLE PLATE RHS	1
M8 NYLOC DOME NUT S/S	7
M8x20mm OVERSIZED WASHER S/S - DIN 9021	7
M8x20 HEX BOLT S/S	7

1.2

Fasteners Supplied for Fireplace and Standard Molle Plate **Set**


M8 NYLOC DOME NUT S/S	15
FULL SIZE FIRE PLACE MOLLE PLATE RHS	1
M8x20mm OVERSIZED WASHER S/S - DIN 9021	15
M8x20 HEX BOLT S/S	15
MOLLE PLATE LH	1

Installation Instructions

Canopy Fitment – Tools, Fasteners & Hardware

2

Component Identification

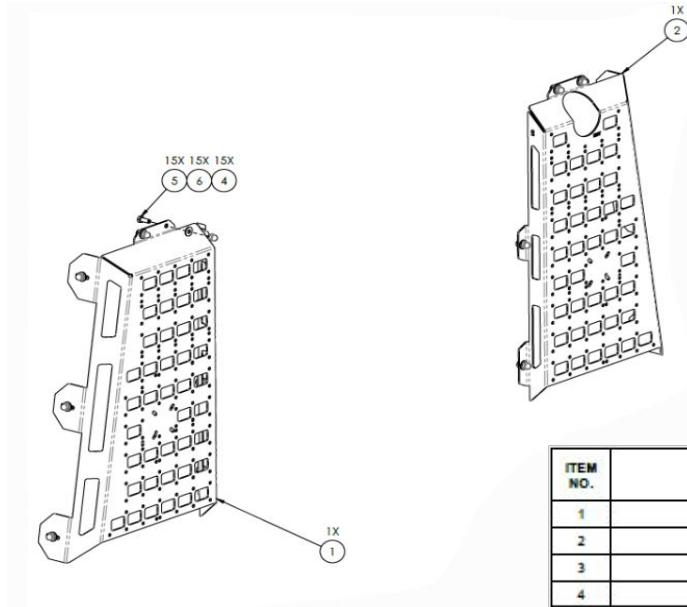

NOTE:

Molle Plate LH is included only when the pair of Molle Plates is ordered

ITEM NO.	PART NUMBER	DESCRIPTION	QTY
1	CC2-A-MP-FS-P001	MOLLE PLATE LH	1
2	CC2-A-MP-FS-FP-P001	FULL SIZE FIRE PLACE MOLLE PLATE RHS	1
3	BX-SF8	SMALL FRIDGE SLIDE - BOX	1
4	NY-DOME-M8	M8 NYLOC DOME NUT 3/8	15
5	HEX-M8x20	M8x20 HEX BOLT 3/8	15
6	FFW-M8	M8x20mm OVERSIZED WASHER 3/8 - DIN 9021	15


Installation Instructions

3

Molle Plate Installation:

Double check all the quantities of the fasteners before starting the installation.

Start the installation by loosening and removing the top hinge M8 nuts from the camper frame. Keep the fasteners for this as they will be placed back once the Molle Plate has been installed. The nuts might struggle to slide freely, if this occurs you can use a screwdriver and a mallet to carefully tap them.


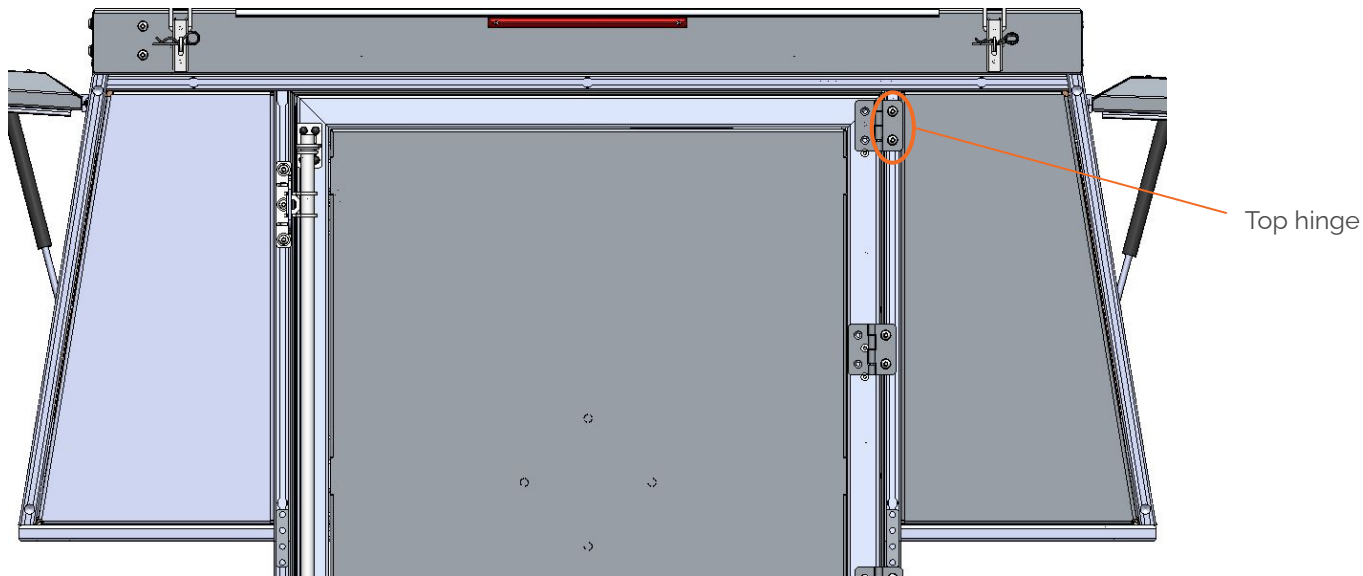


Installation Instructions

3

Molle Plate Installation:

Slide Hex Bolts into the Alu-Cabin Frame. Place the Molle Plates up against the Alu-Cabin to get the spacing correct.

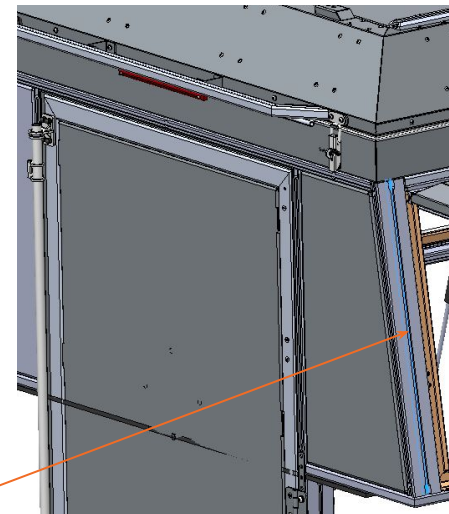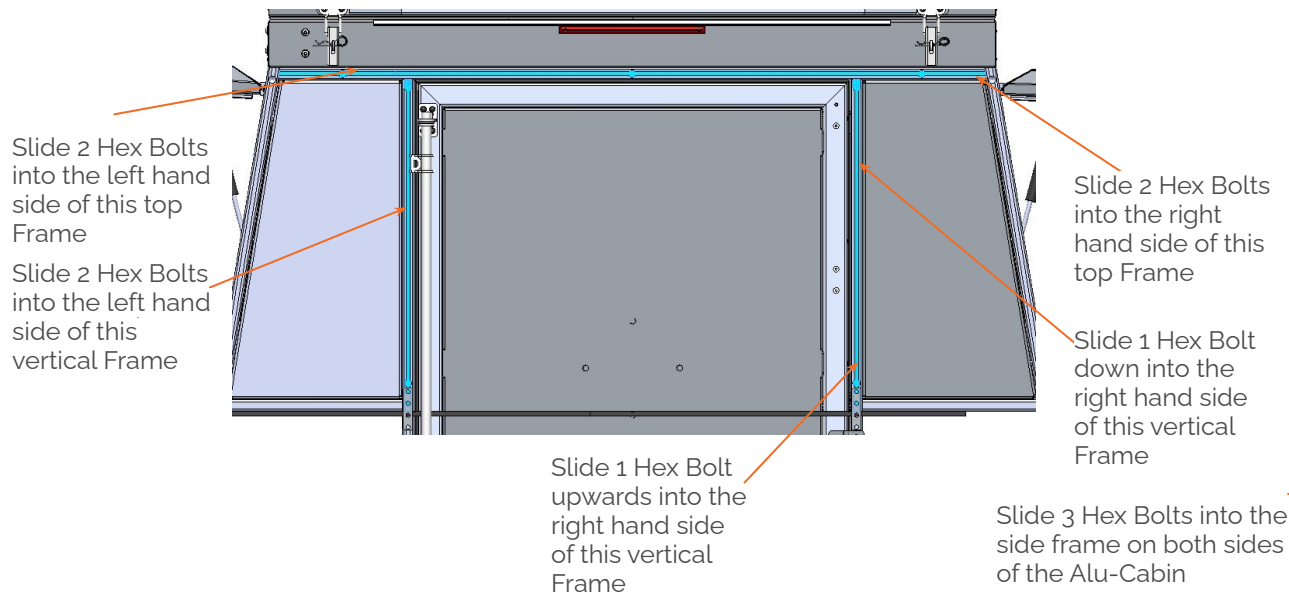


Installation Instructions

3

Molle Plate Installation:

Install the heater. Note the Molle plate is designed to suit the *GP Factor Canopy Camper Dickinson Pg000 Fireplace Fitment Kit*. Before fully installing the outer Flue Cowl / Chimney Cap slide the fireplace molle over the outer chimney stack.

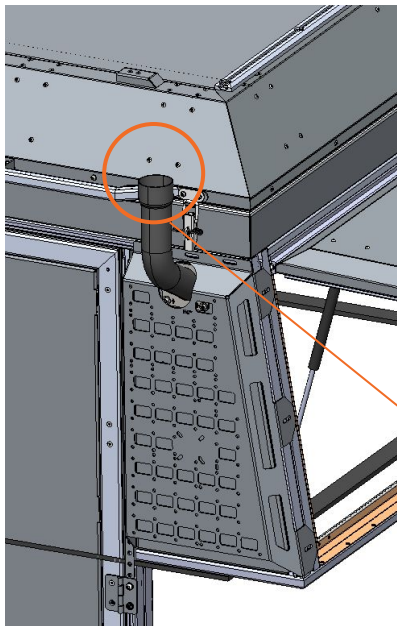

Flue Cowl / Chimney Cap

Flue Cowl / Chimney Cap
not installed yet



Installation Instructions

3

Molle Plate Installation:

With the molle plates in their correct position, fasten them down using the button head bolts and washers, Ensure you stack the washers in the following order: nut, molle plate, flat washer, spring washer and lastly the head of the bolt.

Reinstall the hinges and locking plate you took off at the beginning of the installation, refit and fasten the flue cowl / chimney cap.

Please read the heater's user manual carefully before starting it up for the first time.

Congratulations you have completed the installation!



Disclaimer

All rights reserved. No part of this website may be reproduced, translated, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without prior written permission of the owner.

Review all instructions information carefully before installation.

Any damages, direct or incidental to the installer and/or property due to incorrect installation of any parts are the responsibility of the installer. Due to the various applications and fitment options available, the responsibility lies with the user to ensure all mounting points are secure and tight before every trip.

If unsure, consult with your Distributor regarding the operations of our products.

Users are advised to be mindful of the load they are carrying and drive in accordance with road conditions.

WARNING

Always wear appropriate PPE (Personal protection equipment) when fitting our products. Although the mounting kit is designed to be DIY, if you have any doubts or concerns, contact an accredited fitment centre to carry out the work. Alu-Cab will not be liable for any injury to persons, and/or damage to products and/or vehicles.

While Alu-Cab Holdings takes reasonable measures to ensure that the contents of this Website are accurate and complete, Alu-Cab Holdings makes no representations or warranties, whether express or implied, as to the quality, timeliness, operation, integrity, availability or functionality of this Website or as to the accuracy, completeness or reliability of any information on this Website. Alu-Cab Holdings reserves the right to make changes, corrections and/or improvements to the information and to the products and programs described in such information, at any time without notice.

Alu-Cab Holdings will use reasonable endeavours to maintain the availability of the Website, except during scheduled maintenance periods, and reserves the right to discontinue providing the Website or the service or any part thereof with or without notice to you. Any person who accesses this Website or relies on this Website or on the information contained in this Website does so at his or her own risk.

Occasionally, at our discretion, we may include or offer third-party products or services on our website. These third-party sites have separate and independent privacy policies. We therefore have no responsibility or liability for the content and activities of these linked sites. Nonetheless, we seek to protect the integrity of our site and welcome any feedback about these sites.